




HOSHIZAKI

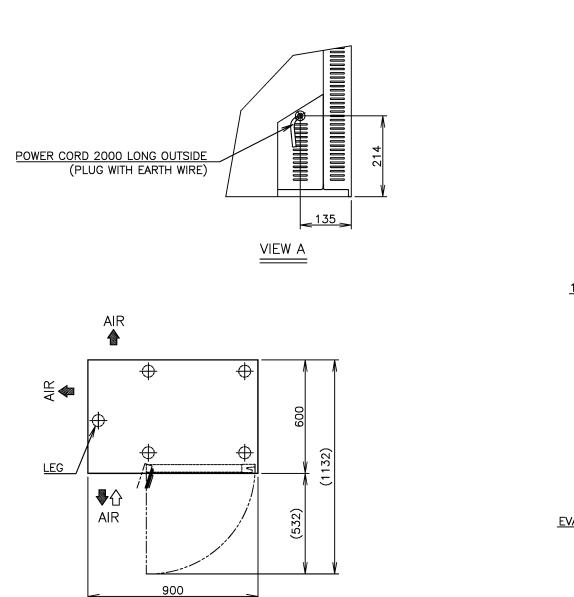




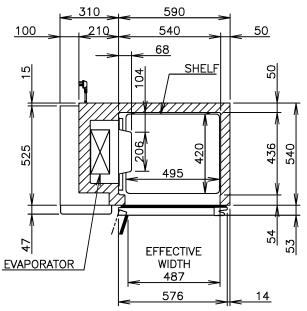

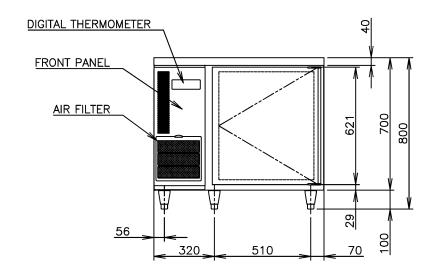

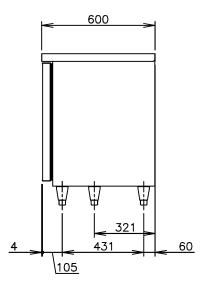

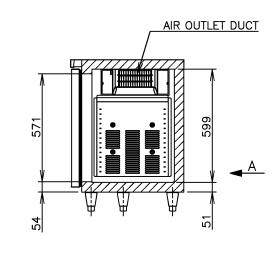

	ITEM	Hoshizaki Undercounter Freezer							
Ī	MODEL	FT-96MA-T							
A	POWER SUPPLY	1 Phase 220V ~ 60Hz Capacity: 1.20kVA(5.45A)							
	AMPERAGE	Rated 2.60A							
	ELECTRIC CONSUMPTION	Motor 415W Heater 349W Refrigeration 255W Defrost 349W							
	HEAT REJECTION	*W							
	POWER CORD	2.0m (Plug with Earth Wire)							
	EFFECTIVE CAPACITY	151L							
	OUTSIDE DIMENSIONS	900mm (W) x 600mm (D) x 800(790-820) mm (H)							
	INSIDE DIMENSIONS	540mm (W) x 436mm (D) x 599mm (H)							
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)							
	INTERIOR	Stainless Steel							
	INSULATION	Polyurethane Foam							
	INSULATION FOAM BLOWING AGENT	Cyclopentane							
	REFRIGERATION SYSTEM	Forced Air Circulation							
	DEFROST SYSTEM	Glass Tube Heater							
	COMPRESSOR	Hermetic							
	CONDENSER	Fin and Tube type, Air—cooled							
	EVAPORATOR	Fin and Tube Type							
	REFRIGERANT	R404A							
	TEMPERATURE CONTROL	Microprocessor controlled Adjustable from −23 to −7°C							
	DEFROST CONTROL	Microprocessor controlled							
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire							
	COMPRESSOR PROTECTION	Motor Protector							
	LEG	Plastic Adjustable 90 to 120mm							
	SHELF	2pcs.							
	WEIGHT	Net: 62kg (Gross: Approx. 67kg)							
	PACKAGE	Carton 965mm (W) x 680mm (D) x 790mm (H)							
	ACCESSORIES	_							
	OPERATING CONDITIONS	Ambient Temperature: 5-43°C Voltage Range: Rated Voltage±6%							
*We reserve the right to make changes in specifications and design without prior noti									

*We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided.
- stated in the instruction manual provided.

 Allow 10mm extra space at the installation site to meet any installation requirements(additional spacing is also required for proper air flow and pipe connections).

 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 50Hz.

 The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.

 3. The cabinet temperature range of -23 to -7°C is guaranteed at ambient temperature of 35°C.

 4. Product code: T271-C200 (HTW)

APPROVED KAWAKAMI		CHECKED WANG	DESIGNED LIANG		AWN HAN	SCALE 1	/20	TRIGONOMETRY	
NAGASE	WANGQ		2020.08.	26	DATE		DRAWING NO.		SYMBOL
APPROVED	DESIGNE	ED SYMBOL	DATE		2019	9.06.17	D25	233	<u> </u>