
HOSHIZAKI

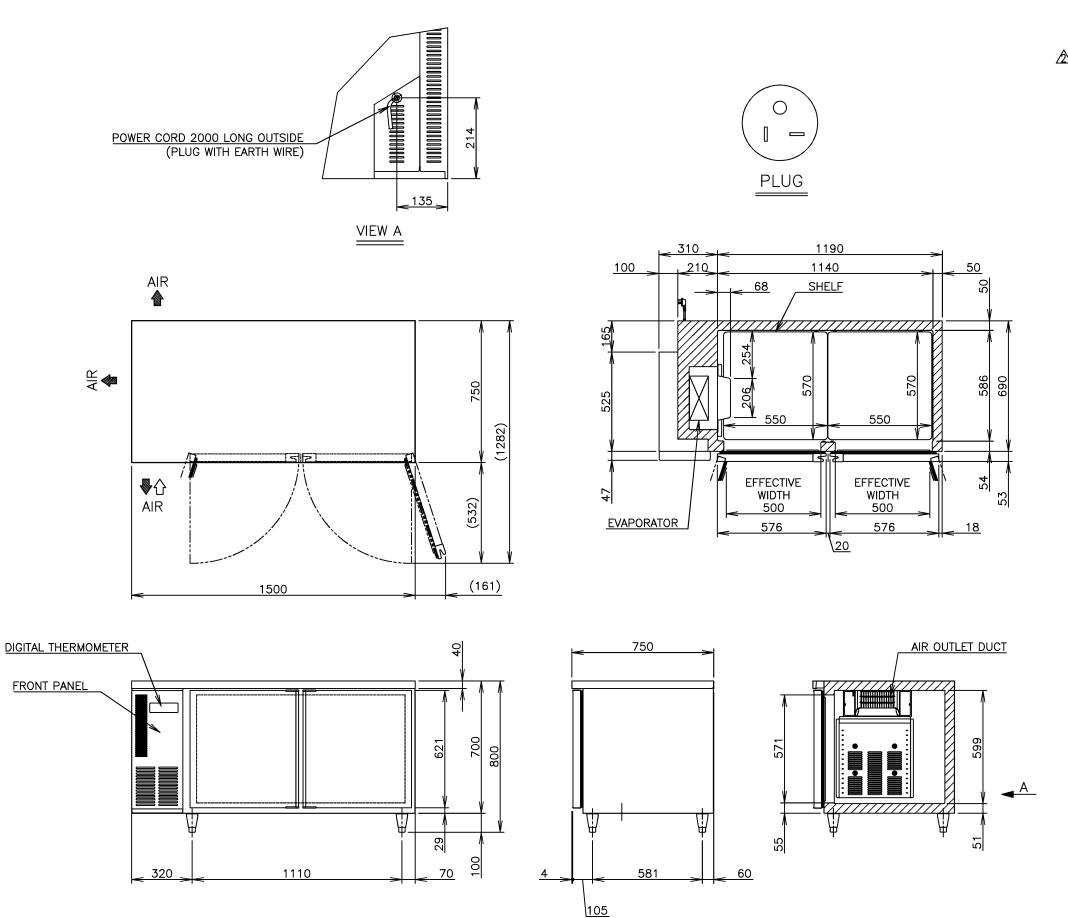

_									
	ITEM	Hoshizaki Undercounter Refrigerator							
ı	MODEL	RT-158MA-T							
A	POWER SUPPLY	1 Phase 220V ~ 60Hz Capacity: 0.55kVA (2.51A)							
	AMPERAGE	Rated 2.00A							
	ELECTRIC CONSUMPTION	Motor 260W Heater 189W Refrigeration 245W Defrost 189W							
ĺ	HEAT REJECTION	*W							
	POWER CORD	2.0m (Plug with Earth Wire)							
Ī	EFFECTIVE CAPACITY	420L							
ı	OUTSIDE DIMENSIONS	1500mm (W) x 750mm (D) x 800(790-820) mm (H)							
ı	INSIDE DIMENSIONS	1140mm (W) x 586mm (D) x 599mm (H)							
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)							
	INTERIOR	Stainless Steel, ABS Plastic (Door)							
Ī	INSULATION	Polyurethane Foam							
	INSULATION FOAM BLOWING AGENT	Cyclopentane							
	REFRIGERATION SYSTEM	Forced Air Circulation							
	DEFROST SYSTEM	Glass Tube Heater							
	COMPRESSOR	Hermetic							
	CONDENSER	Wire and Tube type, Air—cooled							
	EVAPORATOR	Fin and Tube Type							
	REFRIGERANT	R134a							
	TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C							
	DEFROST CONTROL	Microprocessor controlled							
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire							
	COMPRESSOR PROTECTION	Motor Protector							
	LEG	Plastic Adjustable 90 to 120mm							
	SHELF	4pcs.							
	WEIGHT	Net: 87kg (Gross: Approx. 92kg)							
	PACKAGE	Carton 1565mm (W) x 830mm (D) x 790mm (H)							
	ACCESSORIES	-							
	OPERATING CONDITIONS	Ambient Temperature: 5-43°C Voltage Range: Rated Voltage±6%							
•	*We reserve the right to make changes in specifications and design without prior notice								

- Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. stated in the instruction manual provided.

 Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz.

 The amperage and electric consumption are based on measurements at ambient temperature of 38°C.
- on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.

 3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 35°C.

 4. Product code: T269-C200 (HTW)

HOSHI7AKI	UNDERCOUNTER	REFRIGERATOR	$RT_{158MA}T$
HVJHLAM	UNDLIVOUNTLIV		

APPROVED KAWAKAMI	CHECKED WANG	DESIGNED LIANG	DRAWN SHAI	SCALE 1	/20	TRIGON	OMETRY
NAGASE WAN	VGQ Æ	2020.08.2	26 DAT		DRAWING N	DRAWING NO.	
approved desi	GNED SYMBOL	DATE	$\frac{20}{100}$	19.06.17	<u>I</u> D24	24/	<u> </u>