
## **HOSHIZAKI**

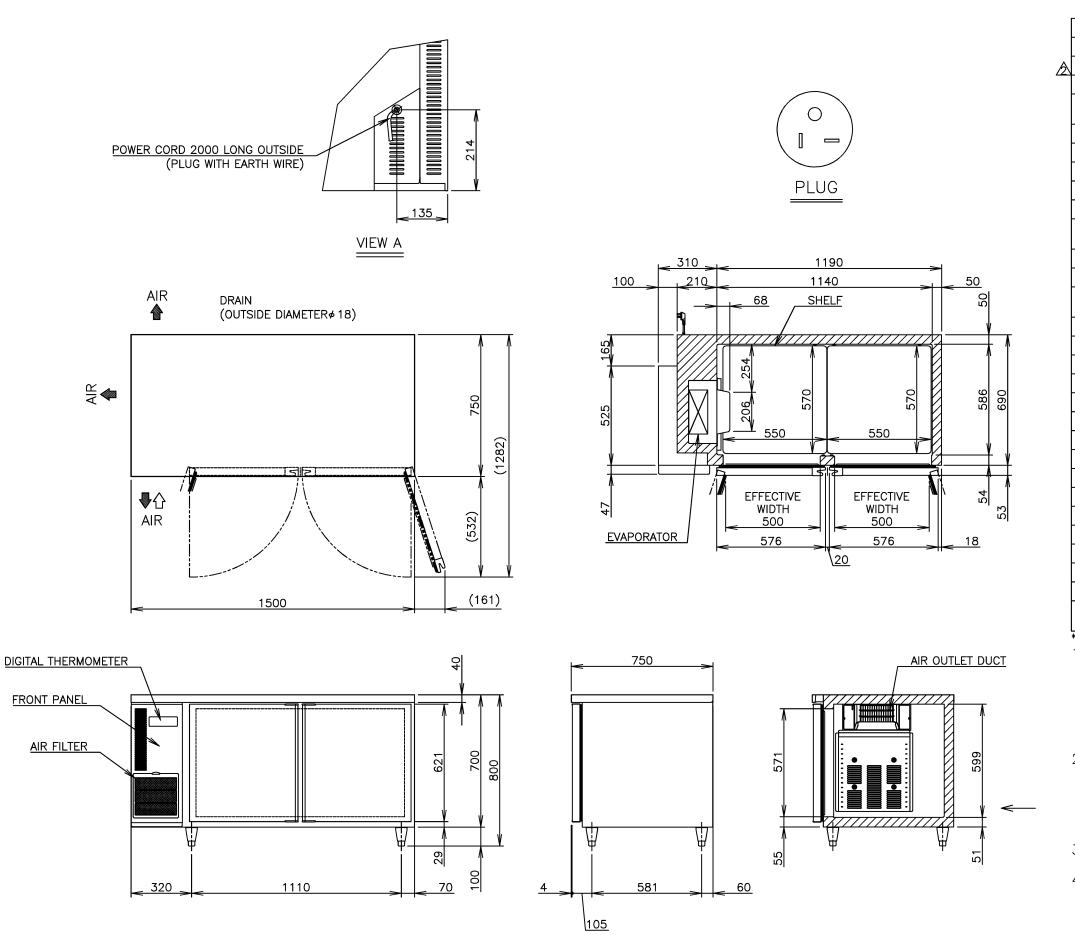

ITEM	Hoshizaki Undercounter Freezer							
MODEL	FT-158MA-T 1 Phase 220V ~ 60Hz Capacity: 1.20kVA (5.45A)							
POWER SUPPLY								
AMPERAGE	Rated 2.70A							
ELECTRIC CONSUMPTION	Motor 415W Heater 375W Refrigeration 333W Defrost 375W							
HEAT REJECTION	*W							
POWER CORD	2.0m (Plug with Earth Wire)							
EFFECTIVE CAPACITY	420L							
OUTSIDE DIMENSIONS	1500mm (W) x 750mm (D) x 800(790-820) mm (H)							
INSIDE DIMENSIONS	1140mm (W) x 586mm (D) x 599mm (H)							
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)							
INTERIOR	Stainless Steel, ABS Plastic (Door)							
INSULATION	Polyurethane Foam							
INSULATION FOAM BLOWING AGENT	Cyclopentane							
REFRIGERATION SYSTEM	Forced Air Circulation							
DEFROST SYSTEM	Glass Tube Heater							
COMPRESSOR	Hermetic							
CONDENSER	Fin and Tube type, Air—cooled							
EVAPORATOR	Fin and Tube Type							
REFRIGERANT	R404A							
TEMPERATURE CONTROL	Microprocessor controlled $$ Adjustable from $-23$ to $-7^{\circ}$ C							
DEFROST CONTROL	Microprocessor controlled							
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire							
COMPRESSOR PROTECTION	Motor Protector							
LEG	Plastic Adjustable 90 to 120mm							
SHELF	4pcs.							
WEIGHT	Net: 89kg (Gross: Approx. 94kg)							
PACKAGE	Carton 1565mm (W) x 830mm (D) x 790mm (H)							
ACCESSORIES	_							
OPERATING CONDITIONS	Ambient Temperature: 5—43°C Voltage Range: Rated Voltage±6%							
*We reserve the right to make changes in specifications and design without prior notice.								

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to
- Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

  2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 50Hz.

  The amperage and electric consumption are based an magazine at ambient temperature of 38°C. on measurements at ambient temperature of 38°C
- and power supply of 230V 50Hz.

  3. The cabinet temperature range of -23 to -7°C is guaranteed at ambient temperature of 35°C.

  4. Product code: T277-C200 (HTW)

APPRON KAWAKA		HECKED WANG	DESIGNED LIANG		AWN HAN	scale 1/20		TRIGONOMETRY	
NAGASE	WANGQ	A	2020.08.26		DATE		DRAWING NO.		SYMBOL
APPROVED	DESIGNE	D SYMBOL	DATE		2019	9.06.17	D25	239	<u> </u>