




HOSHIZAKI

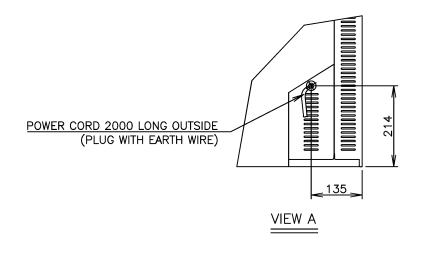





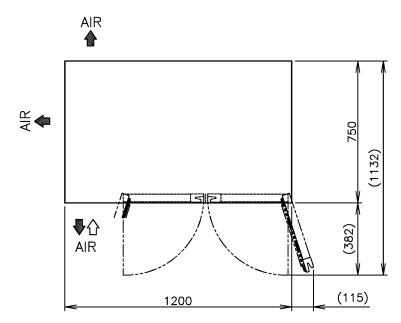

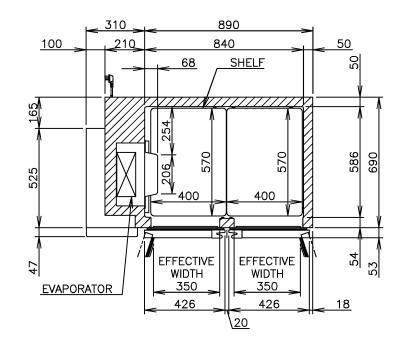

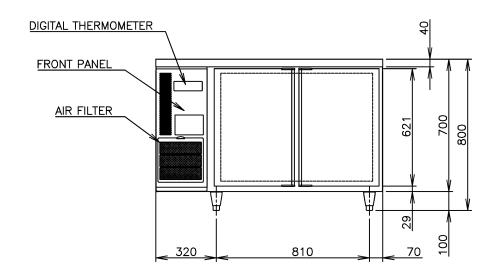

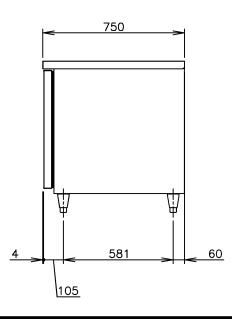

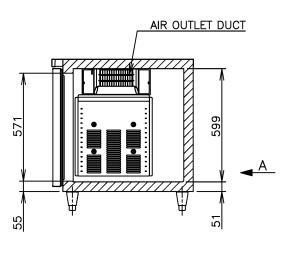

	ITEM	Hoshizaki Undercounter Freezer					
	MODEL	FT-128MA-T					
A	POWER SUPPLY	1 Phase 220V ~ 60Hz Capacity:1.20kVA (5.45A)					
	AMPERAGE	Rated 2.6A					
	ELECTRIC CONSUMPTION	Motor 418W Heater 371W Refrigeration 354W Defrost 371W					
	HEAT REJECTION	*W					
	POWER CORD	2.0m (Plug with Earth Wire)					
	EFFECTIVE CAPACITY	307L					
	OUTSIDE DIMENSIONS	1200mm (W) x 750mm (D) x 800(790-820) mm					
	INSIDE DIMENSIONS	840mm (W) x 586mm (D) x 599mm (I					
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom ABS Plastic (Top & Bottom on Door)					
	INTERIOR	Stainless Steel, ABS Plastic (Door)					
	INSULATION	Polyurethane Foam					
	INSULATION FOAM BLOWING AGENT	Cyclopentane					
	REFRIGERATION SYSTEM	Forced Air Circulation					
	DEFROST SYSTEM	Glass Tube Heater					
	COMPRESSOR	Hermetic					
	CONDENSER	Fin and Tube type, Air—cooled					
	EVAPORATOR	Fin and Tube Type					
	REFRIGERANT	R404A					
	TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -23 to $-$					
	DEFROST CONTROL	Microprocessor controlled					
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire					
	COMPRESSOR PROTECTION	Motor Protector					
	LEG	Plastic Adjustable 90 to 120mm					
	SHELF	4pcs.					
	WEIGHT	Net: 79kg (Gross: Approx. 84kg)					
	PACKAGE	Carton 1265mm (W) x 830mm (D) x 790mm (H)					
	ACCESSORIES	-					
	OPERATING CONDITIONS	Ambient Temperature: 5-43°C Voltage Range: Rated Voltage±6%					
	*We reserve the right t	o make changes in specifications and design without prior notice.					

*We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
- 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 50Hz.

 The amperage and electric consumption are based on measurements at ambient temperature of 38°C
- and power supply of 230V 50Hz.

 3. The cabinet temperature range of -23 to -7°C is guaranteed at ambient temperature of 35°C.

 4. Product code: T276-C200 (HTW)

APPROV KAWAKA		HECKED WANG	DESIGNED LIANG		AWN SHAN	SCALE 1	$\frac{3CALE}{1/20}$		TRIGONOMETRY	
NAGASE	WANG	A	2020.08.26		DATE 2019.06.17		DRAWING NO. D25238		SYMBOL	
APPROVED DESIGNED		D SYMBOL	DATE						<u> </u>	