




HOSHIZAKI

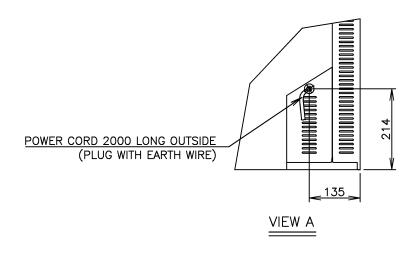





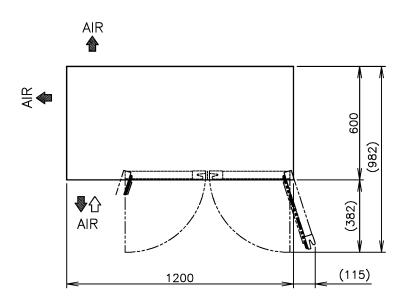

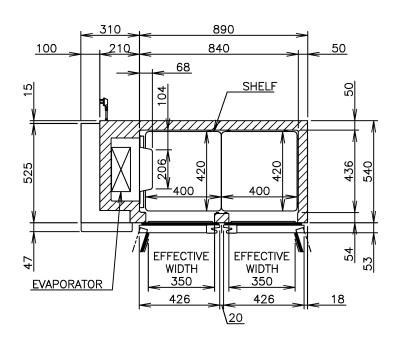

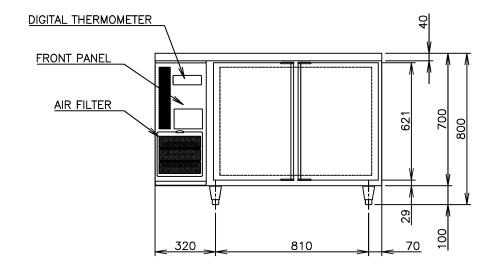

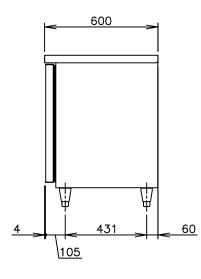

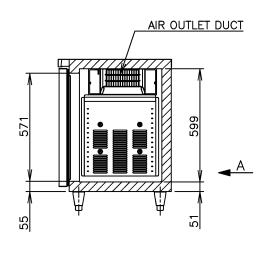

	ITEM	Hoshizaki Undercounter Freezer	
	MODEL	FT-126MA-T	
A	POWER SUPPLY	1 Phase 220V ~ 60Hz Capacity: 1.20kVA (5.45A)	
	AMPERAGE	Rated 2.6A	
	ELECTRIC CONSUMPTION	Motor 410W Heater 371W Refrigeration 342W Defrost 371W	
	HEAT REJECTION	*W	
	POWER CORD	2.0m (Plug with Earth Wire)	
	EFFECTIVE CAPACITY	231L	
	OUTSIDE DIMENSIONS	1200mm (W) x 600mm (D) x 800(790-820) mm (H)	
	INSIDE DIMENSIONS	840mm (W) x 436mm (D) x 599mm (H)	
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)	
	INTERIOR	Stainless Steel, ABS Plastic (Door)	
	INSULATION	Polyurethane Foam	
	INSULATION FOAM BLOWING AGENT	Cyclopentane	
	REFRIGERATION SYSTEM	Forced Air Circulation	
	DEFROST SYSTEM	Glass Tube Heater	
	COMPRESSOR	Hermetic	
	CONDENSER	Fin and Tube type, Air—cooled	
	EVAPORATOR	Fin and Tube Type	
	REFRIGERANT	R404A	
	TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -23 to -7° C	
	DEFROST CONTROL	Microprocessor controlled	
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire	
	COMPRESSOR PROTECTION	Motor Protector	
	LEG	Plastic Adjustable 90 to 120mm	
	SHELF	4pcs.	
	WEIGHT	Net: 72kg (Gross: Approx. 77kg)	
	PACKAGE	Carton 1265mm (W) x 680mm (D) x 790mm (H)	
	ACCESSORIES	-	
	OPERATING CONDITIONS	Ambient Temperature: 5-43°C Voltage Range: Rated Voltage±6%	
5	*We reserve the right to make changes in specifications and design without prior notice.		

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to
- Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 50Hz.

 The amperage and electric consumption are based on magazine at ambient temperature of 38°C. on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.

 3. The cabinet temperature range of -23 to -7°C is guaranteed at ambient temperature of 35°C.

 4. Product code: T272-C200 (HTW)